


Ogniwo ruchome ze śrubą - LBO

Load ring, bolted - LBO

Material/Material: wysokiej wytrzymałości, ulepszony cieplnie, przebadany w 100% elektromagnetycznie na występowanie pęknięć zgodnie z EN 1677-1, współczynnik bezpieczeństwa 4:1.
heavy duty heat treated, 100% electromagnetically crack tested, to EN 1677-1, safety factor 4:1.

Kolor/Colour: powłoka proszkowa w kolorze żółtym / yellow powder coating

Opis/Description: Śruby do ogniw LBO są w 100% przebadane na występowanie pęknięć.
Należy zwrócić uwagę, aby powierzchnia, do której montuje się ogniwo była równa. Uchwyt ogniwa po mocnym dokręceniu musi być obracalny o 360°.
Kontakt z krawędziami elementu podnoszonego oraz obracanie ogniwa pod obciążeniem jest niedozwolone!
Przy transporcie unikać ruchów obrotowych.
Complete with a 100% crack-checked outer and inner hexagonal bolt for universal tool use. The hinged unit is free to rotate through 360°, self-align with the direction of pull and folding. The hoisting Snap Link must be installed in the stress direction before loading, must be able to move freely and may not be supported at an angle. Do not rotate under load. Bolts are Geomet coated.

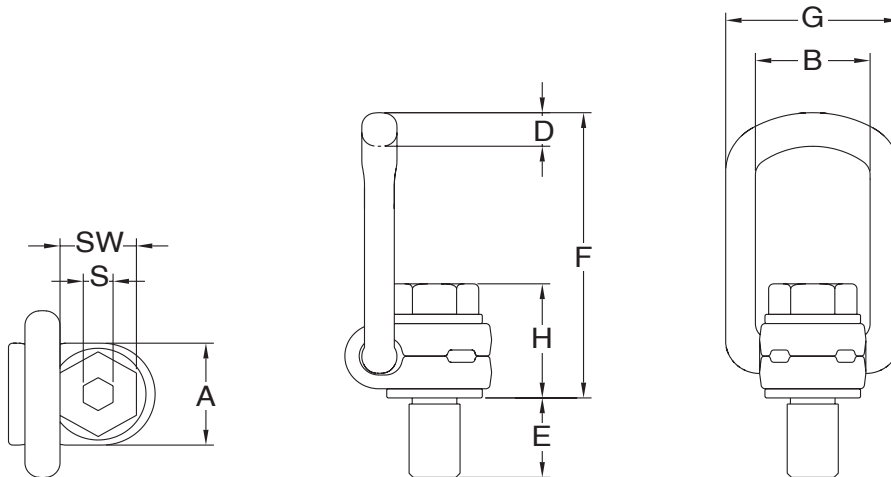

Zestaw naprawczy
Repair kit



Nr katalogowy Item no.	Udźwig(t) Capacity(t)	Gwint Thread	B	E	A	G	D	F	H	S	SW	Ciężar(kg) Weight(kg)	Moment dokręcania Tightening torque	Zestaw naprawczy Repair kit
LBO-08003	0,3	M8	35	11	30	55	10,0	85	35	6	13	0,20	30 Nm	8-P211-003
LBO-10006	0,63	M10	35	16	30	55	10,0	85	36	8	17	0,30	60 Nm	8-P211-006
LBO-12010	1	M12	37	18	33	57	13,5	98	44	8	19	0,50	100 Nm	8-P211-010
LBO-14012	1,2	M14	37	21	33	57	13,5	98	45	10	22	0,50	120 Nm	8-P211-012
LBO-16015	1,5	M16	37	24	33	57	13,5	98	46	10	24	0,50	150 Nm	8-P211-015
LBO-18020	2,0	M18	54	26	50	82	16,5	140	57	12	30	1,30	200 Nm	8-P211-020
LBO-20025	2,5	M20	54	30	50	82	16,5	140	57	12	30	1,30	250 Nm	8-P211-025
LBO-24040	4	M24	54	36	50	82	16,5	140	59	14	36	1,40	400 Nm	8-P211-040
LBO-27040	4	M27	65	38	60	99	22,5	170	79	17	41	2,80	400 Nm	8-P211-042
LBO-30050	5	M30	65	48	60	99	22,5	170	81	17	46	3,10	500 Nm	8-P211-050
LBO-36070	7	M36	65	54	60	99	22,5	178	88	22	55	3,30	700 Nm	8-P211-070
LBO-36080	8	M36	85	62	77	124	26,5	225	101	22	55	5,80	800 Nm	8-P211-080
LBO-42100	10	M42	85	72	77	124	26,5	225	104	24	65	6,30	1000 Nm	8-P211-100
LBO-42150	15	M42	104	63	95	158	36,0	256	112	24	65	10,80	1500 Nm	8-P211-150
LBO-48200	20	M48	104	72	95	158	36,0	259	120	27	75	11,60	2000 Nm	8-P211-200